




Stego, Inc.
 95 Chastain Road NW
 Suite 200
 Kennesaw, GA 30144, USA
Toll-Free: (888) 783-4611 • **Phone:** (770) 984-0858
Email: info@stegousa.com • **Website:** www.stego-usa.com

Part # 02010.0-01, Explosion-proof Heater

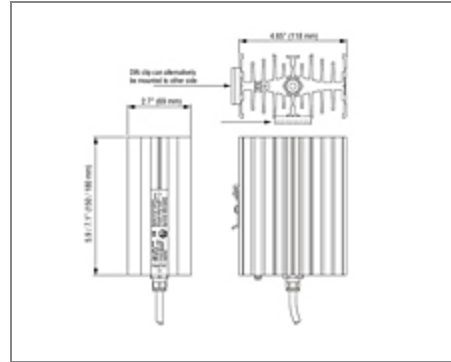

Specifications | Technical Data

Specifications

Power	50 W
Voltage	110 - 120 VAC

Technical Data

Explosion Protection According to EN	LCIE (Laboratoire Central des Industries Electriques)
Conformity Certificate	LCIE 01 ATEX 6073/03, LCIE No.06 ATEX Q8011, IECEx LCI 07. 0021
Heating Element	High performance heating cartridge
Heat Sink	Extruded aluminum, black anodized
Surface Temperature¹	212 °F (100 °C)
Connection Cable	Si HF-JZ 3 x AWG 18 (0.75 mm ²), length 3.3 ft (1 m)
Connection PE	4 mm ²
Mounting	Clip for 35 mm DIN rail (EN 60 715)
Position	Preferably vertical

Dimensions	5.9 x 4.65 x 2.7 inches (150 x 117 x 69 mm)
-------------------	---

Weight	2.9 lb (1.3 kg)
---------------	-----------------

Operating Temperature	-4 to 104 °F (-20 to 40 °C)
------------------------------	-----------------------------

Storage Temperature	-49 to 158 °F (-45 to 70 °C)
----------------------------	------------------------------

Protection Type	IP65
------------------------	------

Protection Class	I (grounded)
-------------------------	--------------

¹ 50W - T5, 100W - T4, Vertical mounting